

ecotile 500/6

The interlocking floor tiles with the hidden joint

A quick, simple and sustainable flooring solution.

T: +44 (0) 1707 800060
F: +44 (0) 1707 657282
E: info@versatileflooring.co.uk
www.versatileflooring.co.uk



Description

ecotile 500/6 interlocking floor tiles are a tough, flexible and modern flooring solution. **ecotile 500/6** is available in two surface textures and 7 standard colours. The tiles have a bevelled hidden joint that creates a smooth smart appearance

ecotile 500/6 can usually be installed without the requirement for a damp proof membrane, screed or adhesive significantly reducing VOC emissions, installation time and cost.

Composition & Manufacture

ecotile 500/6 is injection moulded using compound that has excellent wear characteristics, chemical resistance, long term stability, good weatherability and stable electrical properties.

An Environmentally Sustainable Solution

ecotile 500/6 is produced from the highest quality pre and post consumer recycled material. Once the tiles have reached the end of their useful life we will collect the tiles, free of charge, and recycle them to produce the next generation of ecotile.

Applications


ecotile 500/6 has been used in factories, schools and offices across Europe for over 25 years. Designed to cope with heavy vehicle and fork lift truck traffic, **ecotile 500/6** offers good thermal and acoustic insulation and excellent resistance to impact and vibration.

- Schools
- Shops
- Garages
- Sports Facilities
- Offices
- Passenger Terminals
- Exhibitions
- Utility Rooms
- Workshops
- Light Industrial Units



Key Benefits

- Extremely Hard Wearing.
- Low Life Cycle Cost And Simple To Maintain..
- Smart & Modern Appearance.
- ESD / Anti-static Version Available.
- Ideal For Use With Fork Trucks And Heavy Loads
- Quick And Simple To Install, No Downtime.
- Good Anti-slip Properties
- Protects The Existing Floor From Damage.
- Versatile, Quick And Easy To Amend Design or Layout.
- Ideal For Uneven, Damp Or Contaminated Substrates.
- 10 year Product Warranty.

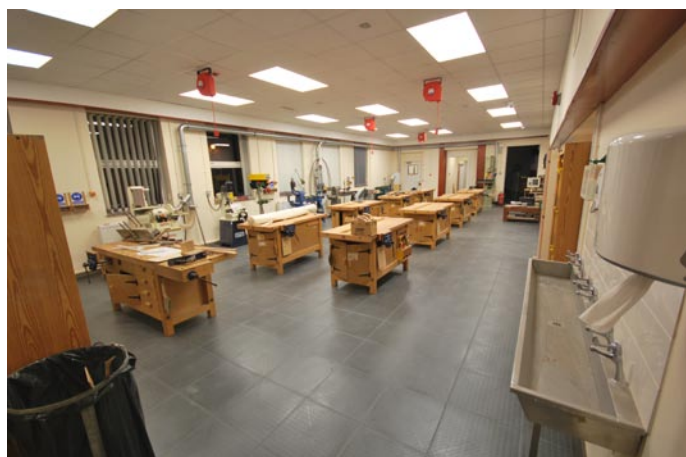

Life Cycle Cost & Environmental Impact

ecotile can usually be installed without the need for any sub-floor preparation and no adhesives are required saving on materials, labour and harmful VOC emissions. Ecotile has an anticipated life span in excess of 25 years. When the floor has reached the end of its usable life, EcoTile can be quickly and simply lifted and, because there is no contamination from adhesive or screed, the tiles can be 100% recycled.

Certification

Manufactured in accordance with ISO9001:2000 & ISO14001:2004.

Appearance & Colours

ecotile 6HJT is available in six standard colours and two finishes. Special colours available on request

Installation

(For detailed instructions please refer to our Installation guidelines)

ecotile is quick and simple to install and the tiles do not require a DPM or gluing to the floor. Installation should start from as close to the centre of the room as possible, install all full size tiles, allow the floor to settle and then cut tiles to fit up to walls and fixed points leaving a 5mm gap for expansion between the tiles and any fixed point.

Cleaning & Maintenance

Sweep regularly to remove particle dirt and occasionally damp mop or use a rotary scrubber dryer to clean the floor using a neutral pH floor cleaner diluted in between 1:80 and 1:50. Application of a hard wearing floor sealer will help maintain the appearance of the floor and extend its lifespan. Please contact us for detailed cleaning and maintenance instructions and a list of approved products.

Accessories

ecotile is available with a full range of accessories including ramps and corners and skirting profiles.

Specification & Technical Data

Please contact our sales team for information on product specification and technical data sheets including test reports.

Product & Technical Data: ecotile 500/6			
Format	Dimensions	Thickness	Weight/m ²
Tile	500 x 500mm	6mm	7.15kgs
Colours	Surface Finish	Pack Size	Coverage per pack/m ²
See Below	Smooth or raised disk	10 tiles	2.5m ²
Fire Classification	Mean Slip Resistance Value	Chemical Resistance	Durability / Anticipated Life Span
BS 476:7 Class 1	Dry: Extremely Low / Wet: Low	Good / Excellent	20 + years

Colour and Surface Textures



EcoTile 500/6
Smooth




EcoTile 500/6
Raised Disk


Light Grey



Dark Grey



Dark Blue - Smooth Only



Terracotta - Smooth Only



Green - Smooth Only



Stone - Smooth Only



The Versatile Flooring Company

1 Devonshire Business Centre
Cranborne Industrial Estate
Potters Bar Hertfordshire EN6 3JR
T: + 44 (0) 01707 800060
F + 44 (0) 1707 657282
www.versatileflooring.co.uk
info@versatileflooring.co.uk

