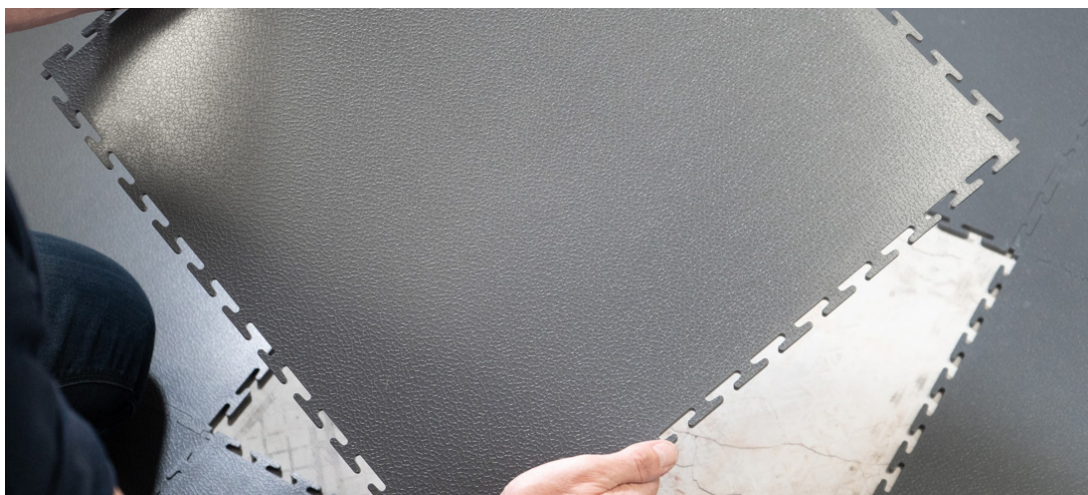


TECHNICAL SPECIFICATIONS

Dimensions:	500mm x 500mm +/- 0.3mm
Thickness:	7.44mm +/- 0.3mm
Weight:	9.18kgs/m ²
Guarantee:	10 Years
Anticipated Service Life:	25 Years +
Material:	PVC
Colours:	Light Grey, Dark Grey, Graphite, Black, Red, Dark Blue, Green, Yellow

Stain Resistace	ISO 26987 Good	
Slip Resistance:	EN 14041 DIN 51130	Pass R10
Fire Performance:	EN 13501-1	Class 1 Spread of Flame Bfl-S1 - Does not support combustion
Effect of Castor Chair	EN ISO 4918	Pass (no damage)
Flexibility	ISO 24344	Pass (no cracking)
Thickness of Wear Layer:	EN ISO 24346	7.44mm +/- 0.1mm
Hardness:	ISO 868	89-92 Shore A
Impact Resistance:	EN ISO 24335	549kg/cm ²
Noise Reduction:	ISO 10140	>46db
Thermal Insulation:	1.1 m ² K/W	
Determination of Length, Squareness & Straightness:	EN ISO 24346	<0.13% / 0.3mm max.
Chemical Resistance:	EN ISO 26987	Good resistance to most commonly used chemicals. Common acid oils & gas oil - No deterioration / Not resistant to prolonged contact

Head Office & Factory

Unit 15 North Luton Industrial Estate
Sedgwick Road, Luton, LU4 9DT
Tel: +44 (0) 1582 788 232
www.ecotileflooring.com

