


Magnum Shear

The perfect tool for cutting ecotile

T: +44 (0) 1707 800060
F: +44 (0) 1707 657282
E: info@versatileflooring.co.uk
www.versatileflooring.co.uk

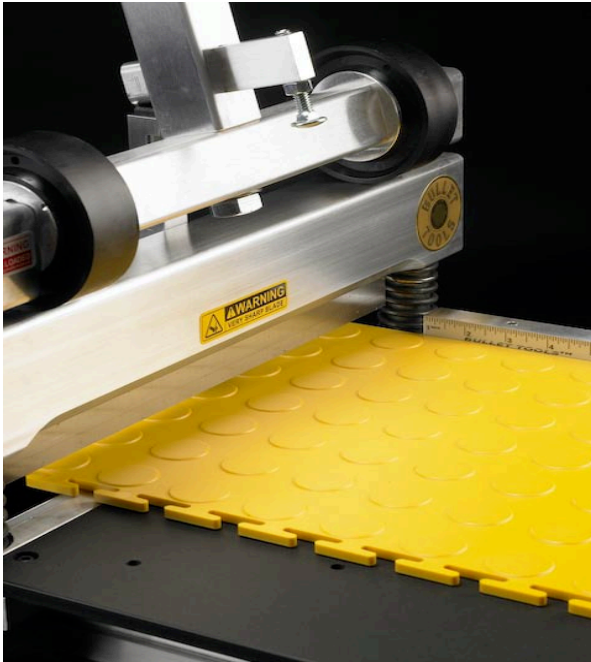

The combination of super-strong components, tremendous leverage, and a razor-sharp blade work together to give you a precision cut every time.

The Magnum X20 Shear has a solid base with steel head and post. The handle is heavy-duty and is 40" long. With a 20" wide cut and overhead cam power transfer. Replaceable hardened steel blade is also included.

The Magnum X20 shear is the perfect tool for cutting Ecotile Interlocking flooring it helps reduce fitting time and gives a neat and precise cut.


- Magnum X20 - 20 inch/ 52 cm wide cut or
- Magnum X20 26 inch / 66cm wide cut
- Weight: 25 or 30 kgs.
- Fence locks at 45 and 90 degree cuts

Key Benefits

- Precision cuts every time
- Reduces fitting time
- Reduces waste and mess
- Hard wearing and durable
- Replaceable blade

Prices

Purchase Price	X20 - £699 + VAT X26 - £799 + VAT
Rental Price X20 ONLY	£ 65 per week or part there off + VAT, Delivery and Collection

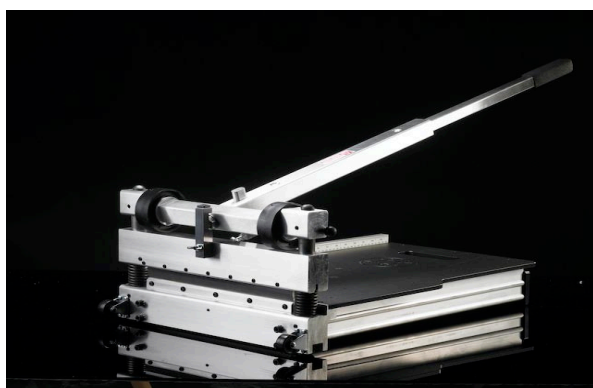

Operating the Magnum X20 Shear:

!! CAUTION BLADE IS EXTREMELY SHARP !!

General Information

The Magnum shear is equipped with a 34 inch (two part) handle that is grasped by the operator and pushed downward. This will drive the blade through the tile. Lift the handle and repeat.

It is recommended that you hold the work piece, to be cut, firmly in place until the blade strikes it. *Always keep hands away from blade while operating or carrying.*

Do not allow the handle to slam back after making a cut.

You should spray a fine layer of light oil (10W motor oil or WD40) over the power assembly once a month to prevent surface rust.

Some softer materials (Ergotile) do not require the use of the handle extension.

The blade must be placed in the head with the flat side towards the operator.

A burr will form on the flat side of the blade after the first few cuts, this is normal. Use the honing stone (included) to remove.

Small nicks or chips may appear on the knife-edge of the blade after cutting harder materials. They usually do not affect the performance of the blade and do not need to be removed when sharpening or honing.

The fence may be positioned in various locations on the table top and is removable allowing materials to be placed on it from any direction.

The use of the fence is not required while cutting.

It is important to secure the handle in the down (front) position with the lock plate while carrying, storing or transporting this tool



The Versatile Flooring Company

1 Devonshire Business Centre
Cranborne Industrial Estate
Potters Bar Hertfordshire EN6 3JR
T: + 44 (0) 01707 800060
F + 44 (0) 1707 657282
www.versatileflooring.co.uk
info@versatileflooring.co.uk

